



Uniclass L725111	EPIC G611
CI/SB (74.26)	X

DATA

Thermostatic & Pressure Balanced Mixing Valve
 Concealed supply
 Maximum Temperature 90°
 Minimum Pressure 0.5 Bar
 Maximum Pressure 12 Bar
 Pressure Differential 10 Bar
 Normal Control Temperature 38°
 Output Temp Differential +/- 1°c
 Max Output 36 l/pm @ 6 Bar

MATERIALS

Mixer Body BZR Brass With Chrome Finish
 Handles ABS Plastic
 Connections G1/2

FEATURES

Thermostatic & Pressure Balanced Cartridges constant temp regardless of pressure variations
 Patented fold away change over valve between bath & shower
 Anti Scald cut off 0.02 seconds
 Quick & Easy to fit & maintain
 Can be Wall or Bath Mounted
 NRV Fitted to Hot & Cold Inlets
 We recommend the use of isolating ball valves with our units

SPEC CODES

Shower Mixer 9680-1530
 Bath/Shower Mixer 9690-1530
 Wall Fixing Bracket 9205-2050
 Bath Legs 255S


APPROVALS

WRAS ISO9001 ISO 14002

APPLICATION

Multi user and multi floor applications. Residential,, hotels, accommodation blocks, halls of residence, barracks,

NEW! Garda Bath & Shower Mixer

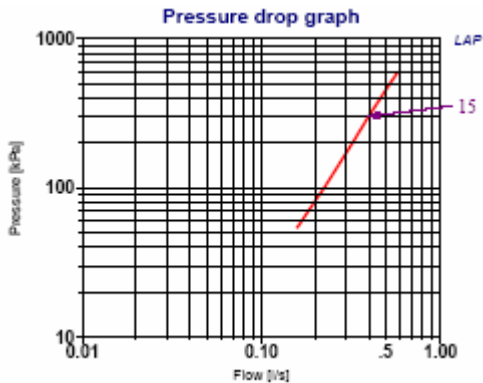

0870 7657987

www.alchallis.com

info@alchallis.com

**10 YEAR
CALCIUM
GUARANTEE**
FM Mattsson

**10 YEAR
TEMPERATURE
GUARANTEE**
FM Mattsson

**10 YEAR
PRESSURE
GUARANTEE**
FM Mattsson



**WRAS
APPROVED
PRODUCT**