



Uniclass L725111	EPIC G611
CI/SfB (74.26)	X

**DATA**

Thermostatic & Pressure Balanced Mixing Valve  
 Concealed supply with Riser Kit  
 Maximum Temperature 90°  
 Minimum Pressure 0.2 Bar  
 Maximum Pressure 12 Bar  
 Pressure Differential 10 Bar  
 Normal Control Temperature 38°  
 Output Temp Differential +/- 1°c  
 Max Output 8 l/pm @ 3 Bar

**MATERIALS**

Mixer Body BZR Brass With Chrome Finish  
 Handles ABS Plastic  
 Connections Inlet Valve Body G3/4 F BSP

**FEATURES**

Thermostatic & Pressure Balanced Cartridges constant temp regardless of pressure variations  
 Anti Scald cut off 0.02 seconds  
 Water Saving Showerhead  
 Quick & Easy to fit & maintain  
 NRV Fitted to Hot & Cold Inlets  
 We recommend the use of isolating ball valves with our units

**SPEC CODES**

9215-0000


**APPROVALS**

WRAS D08 TMV3 ISO9001 ISO 14002

**APPLICATION**

Multi user and multi floor applications. Hospital, hotels, accommodation blocks, halls of residence, barracks, gymnasiums,

# 9215 Combi Kit

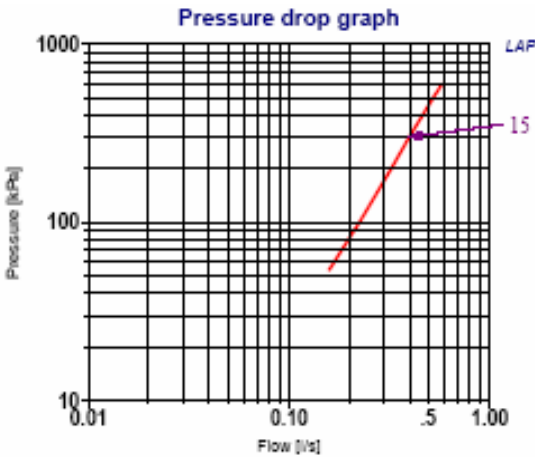

AUTHORISED USER NO. 00146

<b>10 YEAR CALCIUM GUARANTEE</b>	<b>10 YEAR PRESSURE GUARANTEE</b>	<b>10 YEAR TEMPERATURE GUARANTEE</b>
<b>FM Mattsson</b>	<b>FM Mattsson</b>	<b>FM Mattsson</b>

0870 7657987

[www.alchallis.com](http://www.alchallis.com)

@ [info@alchallis.com](mailto:info@alchallis.com)



**WRAS**  
**APPROVED PRODUCT**

