



Uniclass L725111	EPIC G611
CI/SFB (74.26)	X

DATA

Thermostatic & Pressure Balanced Mixing Valve
 Concealed supply c/w Exposed Anti Vandal Head
 Maximum Temperature 90°
 Minimum Pressure 0.2 Bar
 Maximum Pressure 12 Bar
 Pressure Differential 10 Bar
 Normal Control Temperature 38°
 Output Temp Differential +/- 1°c
 Max Output 8 l/pm @ 6 Bar

MATERIALS

Mixer Body BZR Brass With Chrome Finish
 Handles ABS Plastic
 Anti Vandal Showerhead BZR Brass & ABS Plastic
 Connections G1/2

FEATURES

Thermostatic & Pressure Balanced Cartridges constant temp regardless of pressure variations
 Anti Scald cut off 0.02 seconds
 Water Saving Showerhead
 Quick & Easy to fit
 Maintenance from the front of the unit
 NRV Fitted to Hot & Cold Inlets
 We recommend the use of isolating ball valves with our units

SPEC CODES

Mixer 9235-0000
 Anti Vandal Showerhead 255S or 280AVS



APPROVALS

WRAS ISO9001 ISO 14002

APPLICATION

Suitable for panel or cubicle fixing. Multi user and multi floor applications.
 Hospital, hotels,
 accommodation blocks, halls of residence, barracks, gymnasiums,

FMM 01 Kit

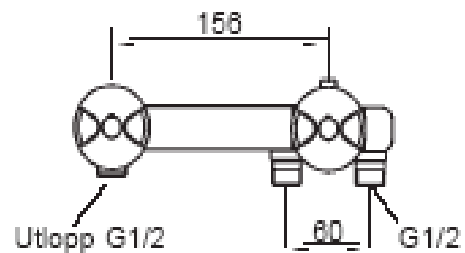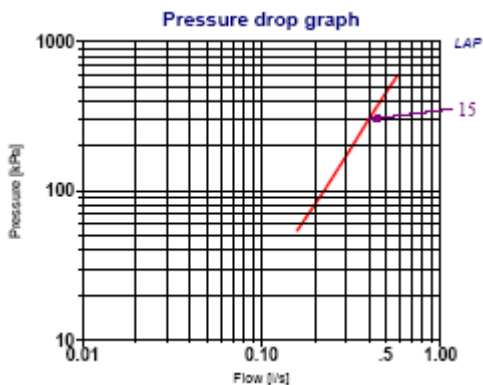

**5 YEAR
CALCIUM
GUARANTEE**
FM Mattsson

**5 YEAR
TEMPERATURE
GUARANTEE**
FM Mattsson

**5 YEAR
PRESSURE
GUARANTEE**
FM Mattsson

0870 7657987

www.alchallis.com

info@alchallis.com

