



Uniclass L725111	EPIC G611
CI/SB (74.26)	X

DATA

Thermostatic & Pressure Balanced Mixing Valve
 Concealed supply c/w Exposed Riser Kit
 Maximum Temperature 90°
 Minimum Pressure 0.2 Bar
 Maximum Pressure 12 Bar
 Pressure Differential 10 Bar
 Normal Control Temperature 38°
 Output Temp Differential +/- 1°c
 Max Output 8 l/pm @ 6 Bar

MATERIALS

Mixer Body BZR Brass With Chrome Finish
 Handles ABS Plastic
 Riser Kit Steel & ABS Plastic
 Connections G1/2

FEATURES

Thermostatic & Pressure Balanced Cartridges constant temp regardless of pressure variations
 Anti Scald cut off 0.02 seconds
 Quick & Easy to fit
 Maintenance from the front of the unit
 NRV Fitted to Hot & Cold Inlets
 We recommend the use of isolating ball valves with our units

SPEC CODES

Mixer FMM02
 Wall Cover Plate (Optional) 0000-0002

APPROVALS

WRAS ISO9001 ISO 14002


APPLICATION

Suitable for panel or cubicle fixing. Multi user and multi floor applications.
 Hospital, hotels,
 accommodation blocks, halls of residence, barracks, gymnasiums,

FMM 02 Kit



Pressure drop graph

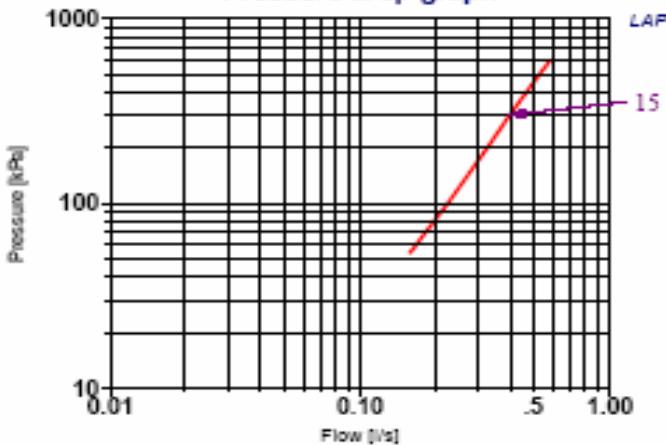

**10 YEAR
CALCIUM
GUARANTEE**
 FM Mattsson

**10 YEAR
TEMPERATURE
GUARANTEE**
 FM Mattsson

**10 YEAR
PRESSURE
GUARANTEE**
 FM Mattsson

☎ 0870 7657987

🌐 www.alchallis.com

@ info@alchallis.com

