



Uniclass L725111	EPIC G611
CI/SB (74.26)	X

DATA

Thermostatic & Pressure Balanced Mixing Valve
 Concealed supply c/w Anti Tamper Head
 Maximum Temperature 90°
 Minimum Pressure 0.5 Bar
 Maximum Pressure 12 Bar
 Pressure Differential 10 Bar
 Temperature Differential 0°
 Normal Control Temperature 38°
 Output Temp Differential +/- 1°c
 Max Output 8 l/pm @ 3 Bar

MATERIALS

Mixer Body BZR Brass With Chrome Finish
 Handles ABS Plastic
 Anti Vandal Showerhead BZR Brass & ABS Plastic
 Connections G1/2

FEATURES

Thermostatic & Pressure Balanced Cartridges constant temp regardless of pressure variations
 Anti Scald cut off 0.02 seconds
 Water Saving Anti Tamper Showerhead Push Fit Connections
 Quick & Easy to fit & maintain
 NRV Fitted to Hot & Cold Inlets
 We recommend the use of isolating ball valves with our units

SPEC CODES

Mixer 9211-7500 TMV2-3 9211-770
 Fixing Bracket 9205-2050
 Anti Vandal Showerhead 255




APPROVALS

WRAS D08 TMV3 TMV2 (9211-7700) ISO9001 ISO 14002
 NCAGE No KC1U7

APPLICATION

Multi user and multi floor applications. Hospital, hotels, accommodation blocks, halls of residence, barracks, gymnasiums

FMM 03 Kit

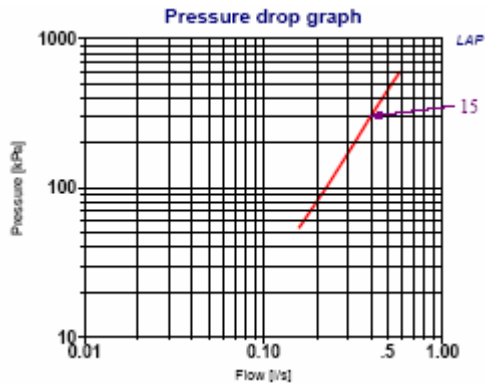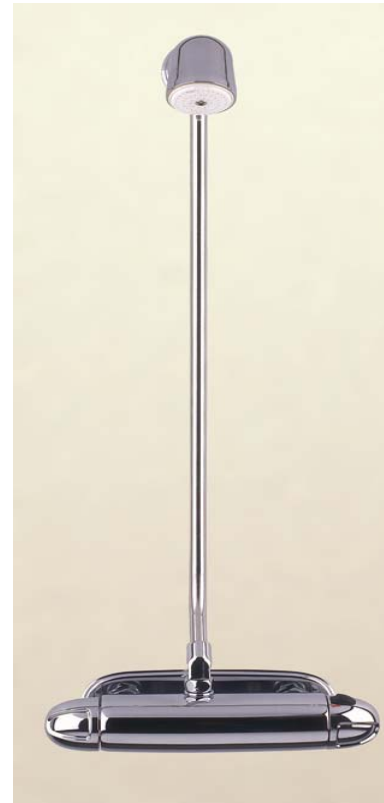

☎ 0870 7657987

🌐 www.alchallis.com

@ info@alchallis.com

