



| | |
|---------------------|--------------|
| Uniclass L725111 | EPIC G611 |
| CI/SFB (74.26) | X |

DATA

Thermostatic & Pressure Balanced Mixing Valve
 Exposed Supply c/w Exposed Riser & Adjustable or Anti Vandal Head
 Maximum Temperature 90°
 Minimum Pressure 0.5 Bar
 Maximum Pressure 12 Bar
 Pressure Differential 10 Bar
 Maximum Control Temperature 44°
 Output Temp Differential +/- 1°c
 Max Output 8 l/pm @ 6 Bar

MATERIALS

Mixer Body BZR Brass With Chrome Finish
 Handles ABS Plastic
 Showerhead ABS Plastic
 Shower Arm BZR Brass
 Connections Inlet Valve Body G3/4 F BSP
 Connections supply Wall Fixing Plate 1/2 BSP

FEATURES

Thermostatic & Pressure Balanced Cartridges giving constant temp regardless of pressure variations
 Anti Scald cut off 0.02 seconds
 Water Saving Showerhead
 Quick & Easy to fit & maintain
 NRV Fitted to Hot & Cold Inlets
 We recommend the use of isolating ball valves with our units

SPEC CODES

CC 05 Thermostatic & Pressure Balanced Mixer Kit
 CC 05 Thermostatic & Pressure Balanced Mixer Kit Anti Vandal

APPROVALS

WRAS D08 TMV3 ISO9001 ISO 14002 NCAGE No KC1U7


APPLICATION

Multi user and multi floor applications. Hospital, hotels, accommodation blocks, halls of residence, barracks, gymnasiums.


FMM 05 Kit



CC 05

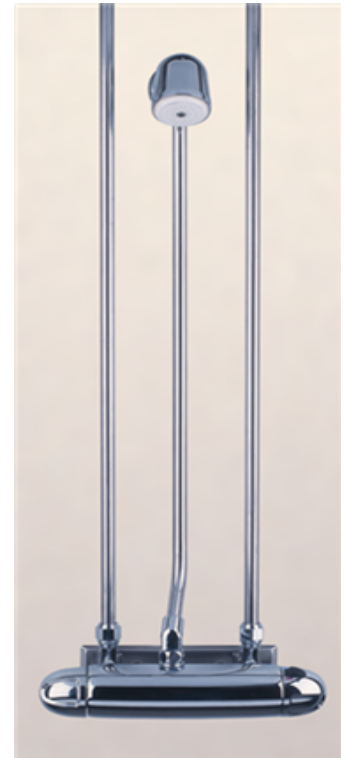

CC 05 AV

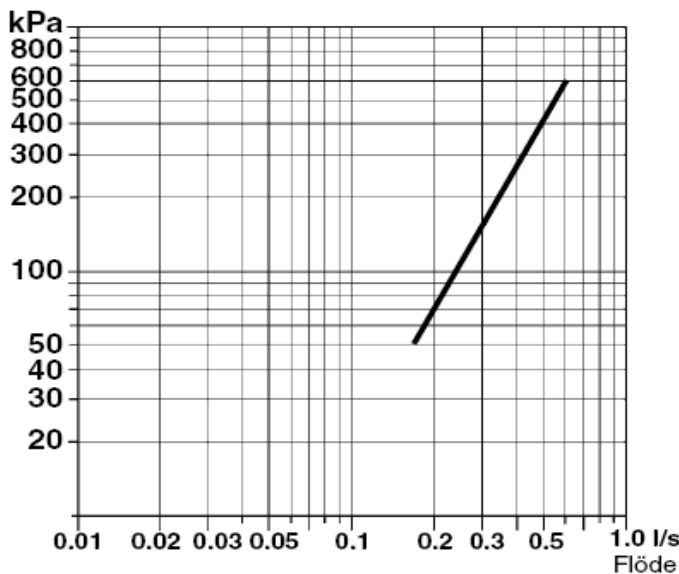

**10 YEAR
CALCIUM
GUARANTEE**
FM Mattsson

**10 YEAR
PRESSURE
GUARANTEE**
FM Mattsson

**10 YEAR
TEMPERATURE
GUARANTEE**
FM Mattsson

☎ 0870 7657987

🌐 www.alchallis.com

@ info@alchallis.com

