



| | |
|---------------------|--------------|
| Uniclass L725111 | EPIC G611 |
| C/S/B (74.26) | X |

DATA

Thermostatic & Pressure Balanced Mixing Valve
 Concealed supply c/w top exit
 Maximum Temperature 90°
 Minimum Pressure 1.0 Bar
 Maximum Pressure 12 Bar
 Pressure Differential 10 Bar
 Normal Control Temperature 38°
 Output Temp Differential +/- 1°c
 Max Output 8 l/pm @ 6 Bar

MATERIALS

Mixer Body BZR Brass With Chrome Finish
 Handles ABS Plastic
 Connectio Inlet Valve Body 15mm

FEATURES

Thermostatic & Pressure Balanced Cartridges constant temp regardless of pressure variations
 Anti Scald cut off 0.02 seconds
 Quick & Easy to fit & maintain
 NRV Fitted to Hot & Cold Inlets
 We recommend the use of isolating ball valves with our units

SPEC CODES

Mixer 9250-0050 Frost



APPROVALS

WRAS

APPLICATION

Multi user and multi floor applications. Hospital, hotels, accommodation blocks, halls of residence, barracks, gymnasiums

9250-0050

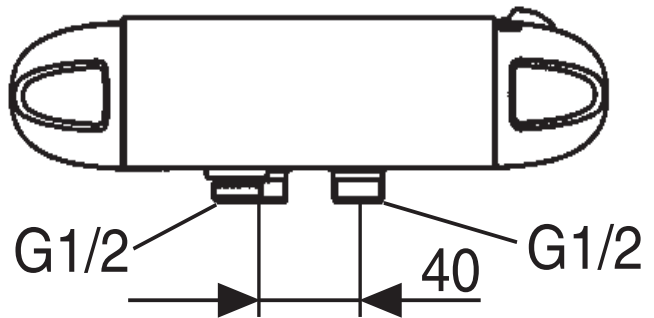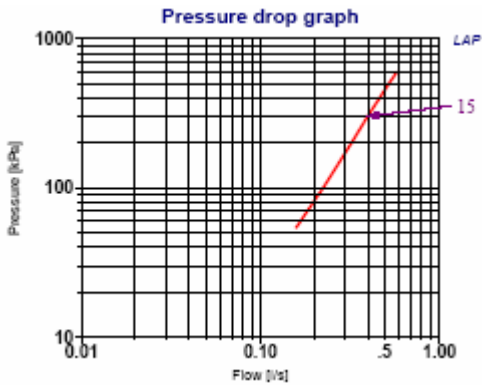

**10 YEAR
CALCIUM
GUARANTEE**
 FM Mattsson

**10 YEAR
PRESSURE
GUARANTEE**
 FM Mattsson

**10 YEAR
TEMPERATURE
GUARANTEE**
 FM Mattsson

☎ 0870 7657987

🌐 www.alchallis.com

@ info@alchallis.com

