



Uniclass L725111	EPIC G611
CI/SfB (74.26)	X

DATA

Thermostatic Anti Tamper Mixing Valve with Electronic Control
 Concealed supply or Exposed Supply
 Maximum Temperature 85°
 Minimum Pressure 1.0 Bar
 Maximum Pressure 10 Bar
 Pressure Differential 5 Bar
 Normal Control Temperature 38°
 Output Temp Differential +/- 1°c
 Max Output 12 l/pm @ 3 Bar
 Power Mains or 4x1.5 Volt Battery
 Battery Life 3 Year

Mora Tronic Compact 720

MATERIALS

Mixer Body BZR Brass With ABS Shroud Chrome Finish
 Connections G1/2

FEATURES



Set Thermostatic Control Right at the Head. **NO DEAD LEGS**
 Enhanced Safety Features Anti Scald cut off
 Water Saving Showerhead with Anti Scale max 12 litres per minute
 Quick & Easy to fit & maintain
 Electronic Push Button Control 10-60 Seconds Adjustable
 NRV Fitted to Hot & Cold Inlet
 Sensor Lead Can be easily hidden in grouting
 We recommend the use of isolating ball valves with our units
 5 Year Guarantees

SPEC CODES

Exposed Supply Top Entry Thermostatic Unit (Battery)	720156
Concealed Supply Rear Entry Pre Blended Unit (Battery)	720158
Exposed Supply Top Entry Pre Blended Unit (Mains)	720160
Concealed Supply Rear Entry Thermostatic Unit (Battery)	720154

APPLICATION

Ideally suited for application where control, safety and anti tamper capabilities are important such as prisons, accommodation blocks, halls of residence, schools barracks, gymnasiums and leisure centres.

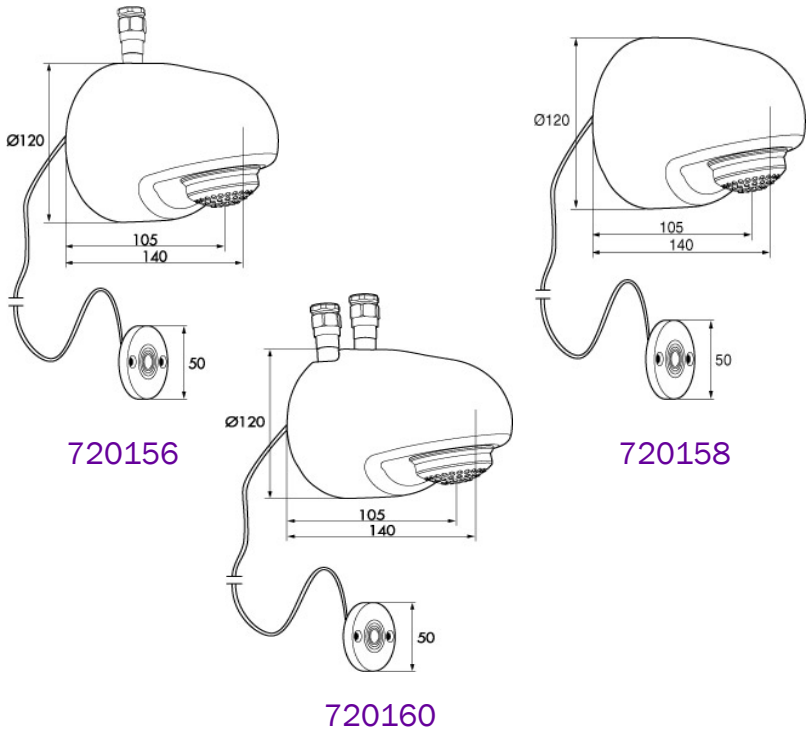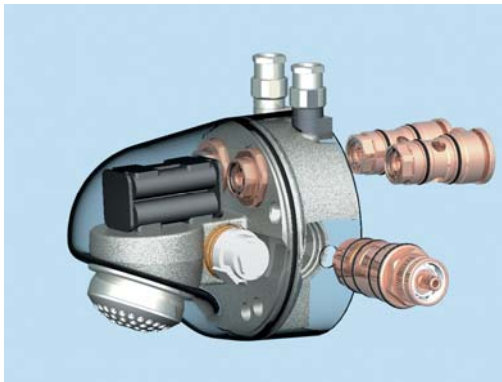

01628 529024

www.alchallis.com

@ info@alchallis.com