



Uniclass L725111	EPIC G611
CI/SfB (74.26)	X

**DATA**

Thermostatic Anti Tamper Mixing Valve with Electronic Control  
 Concealed supply or Exposed Supply  
 Maximum Temperature 85°  
 Minimum Pressure 1.0 Bar  
 Maximum Pressure 10 Bar  
 Pressure Differential 5 Bar  
 Normal Control Temperature 38°  
 Output Temp Differential +/- 1°c  
 Max Output 12 l/pm @ 3 Bar  
 Power Mains or 4x1.5 Volt Battery  
 Battery Life 3 Year

# Mora Tronic Compact 720

**MATERIALS**

Mixer Body BZR Brass With ABS Shroud Chrome Finish  
 Connections G1/2

**FEATURES**



Set Thermostatic Control Right at the Head. **NO DEAD LEGS**  
 Enhanced Safety Features Anti Scald cut off  
 Water Saving Showerhead with Anti Scale max 12 litres per minute  
 Quick & Easy to fit & maintain  
 Electronic Push Button Control 10-60 Seconds Adjustable  
 NRV Fitted to Hot & Cold Inlet  
 Sensor Lead Can be easily hidden in grouting  
 We recommend the use of isolating ball valves with our units  
 5 Year Guarantees

**SPEC CODES**

Exposed Supply Top Entry Thermostatic Unit (Battery)	720156
Concealed Supply Rear Entry Pre Blended Unit (Battery)	720158
Exposed Supply Top Entry Pre Blended Unit (Mains)	720160
Concealed Supply Rear Entry Thermostatic Unit (Battery)	720154

**APPLICATION**

Ideally suited for application where control, safety and anti tamper capabilities are important such as prisons, accommodation blocks, halls of residence, schools barracks, gymnasiums and leisure centres.

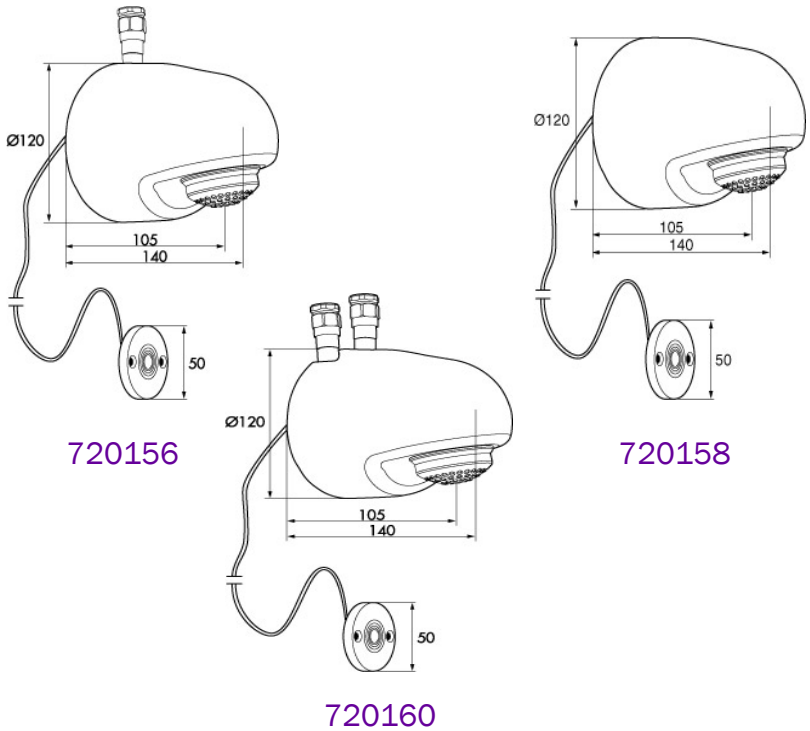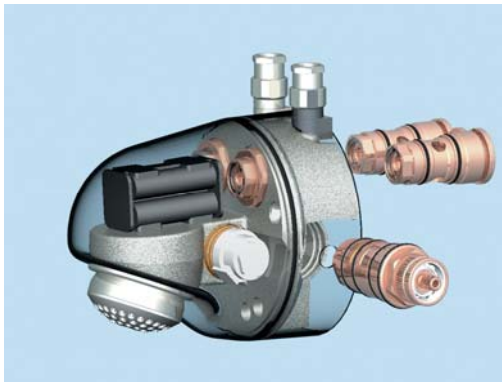

01628 529024

[www.alchallis.com](http://www.alchallis.com)

@ [info@alchallis.com](mailto:info@alchallis.com)