



Uniclass L725111	EPIC G611
CI/SB (74.26)	X

DATA

Thermostatic & Pressure Balanced Basin Tap

Maximum Temperature	90°
Minimum Pressure	0.5 Bar
Maximum Pressure	12 Bar
Pressure Differential	10 Bar
Normal Control Temperature	38°
Output Temp Differential	+/- 1°c

MATERIALS

Mixer Body	BZR Brass With Chrome Finish
Handles	ABS Plastic
Connections	G1/2

FEATURES

Thermostatic & Pressure Balanced Cartridges constant temp regardless of pressure variations
 Anti Scald cut off 0.02 seconds
 Quick & Easy to fit & maintain
 All maintenance from above
 We recommend the use of isolating ball valves with our units

SPEC CODES

Mixer 9226-1000



APPROVALS

WRAS ISO9001 ISO 14002

APPLICATION

Multi user and multi floor applications. Residential,, hotels, accommodation blocks, halls of residence, barracks, care homes, hospitals, sheltered housing.

**9226-1000
Thermostatic & Pressure
Balanced Basin Tap**

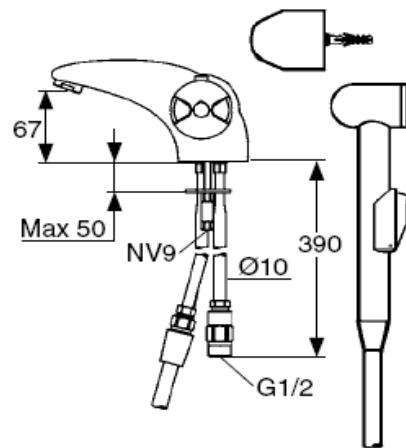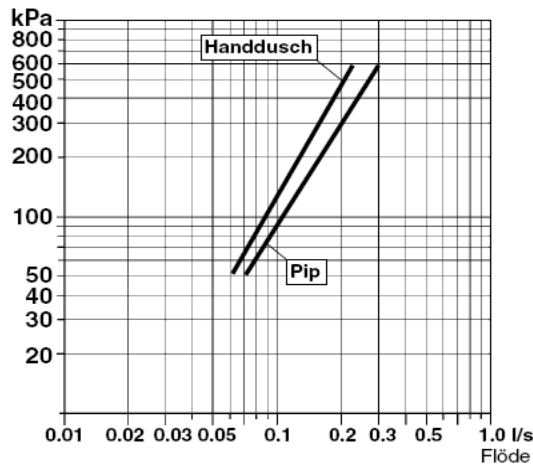

**10 YEAR
CALCIUM
GUARANTEE**
FM Mattsson

**10 YEAR
TEMPERATURE
GUARANTEE**
FM Mattsson

**10 YEAR
PRESSURE
GUARANTEE**
FM Mattsson

☎ 0870 7657987

🌐 www.alchallis.com

@ info@alchallis.com



**WRAS
APPROVED
PRODUCT**