



Uniclass L725111	EPIC G611
CI/SfB (74.26)	X

**DATA**

Maximum Temperature 60°c  
 Minimum Pressure 1.0 bar  
 Maximum Pressure 12.0 bar  
 Connections Various (See Below)  
 Normal Flow Rates 6 Litres per Minute @ 3 Bar


# Aquiv8 Tap Aerator

**MATERIALS**

Body Brass with Chrome Plate Finish  
 Internals ABS Plastic & Rubber  
 Swivel Brass with Chrome Plate Finish  
 And Nylon Socket

**APPLICATION**

Aquiv8 water saving tap aerators conforms to the highest standards. Units are designed for use in a wide range of applications and can be easily and quickly fitted to most modern taps without interruption to the supply. Units are approved for inclusion on the Enhanced Capital Allowance Scheme Water Technology List and as such are 100% allowable against taxable profits

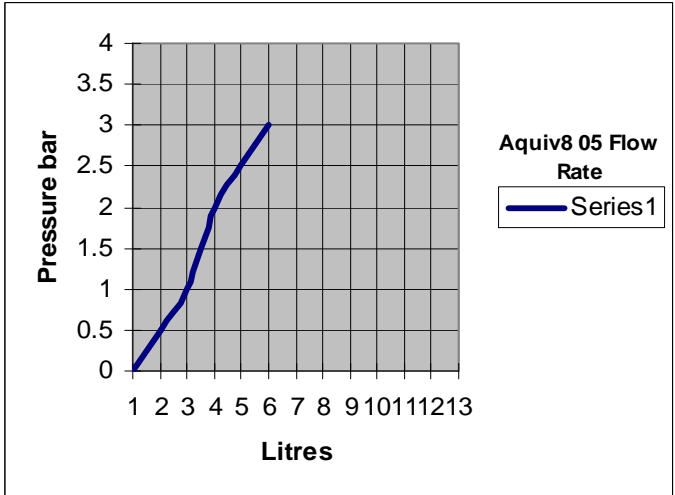

Order No	Description	Flow Rates	Thread
LSP-02/13	Wash Basin Long Casing	13	M22 x 1.00mm Inside
LSP-02/9	Kitchen Tap Long Casing	9	M22 x 1.00mm Inside
LSP-03/9	Kitchen Tap Long Casing	9	M22 x 1.50mm Inside
LSP-02/6	Wash Basin Long Casing	6	M22 x 1.00mm Inside
LSP-03/6	Wash Basin Long Casing	6	M22 x 1.50mm Inside
LSP-002/13	Wash Basin Short Casing	13	M22 x 1.00mm Inside
LSP-002/9	Kitchen Tap Short Casing	9	M22 x 1.00mm Inside
LSP-002/6	Wash Basin Short Casing	6	M22 x 1.00mm Inside
LSP-22/9	Kitchen Tap Short Casing c/w Swivel	9	M22 x 1.00mm Inside
LSP-0022/9	Kitchen Tap Short Casing c/w Swivel	9	M22 x 1.00mm Inside
LSP-23/9	Kitchen Tap Short Casing c/w Swivel	9	M22 x 1.50mm Inside
LSP-0022/6	Wash Basin Short Casing c/w Swivel	6	M22 x 1.00mm Inside
LSP-23/6	Wash Basin Short Casing c/w Swivel	6	M22 x 1.50mm Inside
LSP-24/9	Kitchen Tap Long Casing c/w Swivel	9	M24 x 1.00mm Outside
LSP-0024/9	Kitchen Tap Medium Casing c/w Swivel	9	M24 x 1.00mm Outside
LSP-0024/6	Wash Basin Medium Casing c/w Swivel	6	M24 x 1.00mm Outside
LSP-05/9	Kitchen Tap Medium Casing	9	M24 x 1.00mm Outside
LSP-05/6	Wash Basin Medium Casing	6	M24 x 1.00mm Outside
LSP-005/6	Wash Basin Short Casing	6	M24 x 1.00mm Outside





Uniclass L725111	EPIC G611
CI/SfB (74.26)	X

**DATA**

Maximum Temperature 60°c  
 Minimum Pressure 1.0 bar  
 Maximum Pressure 12.0 bar  
 Connections Various (See Below)  
 Normal Flow Rates 6 Litres per Minute @ 3 Bar

**MATERIALS**

Body Brass with Chrome Plate Finish  
 Expander Butyl Rubber

**APPLICATION**

Adaptors are ideally suited for application where the tap either has no internal or external thread to which the aerator can be attached or the threads are non standard. The adaptors can be inserted into the tap hole and the rubber gasket expanded (with Alum Key) to grip the internal wall of the tap. The aerator can then be screwed on to the adaptor thread. Ideal for retrofit applications or use with older taps. We do not recommend use of these adaptors with oval tap outlets.

**TO SPECIFY**

LSP-07 Diam 18-22mm M22x1  
 LSP-06 Diam 13.5-17mm M22x1

# Aquiv8 Tap Aerator Adaptors



 **0870 7657987**

 **[www.alchallis.com](http://www.alchallis.com)**

 **[info@alchallis.com](mailto:info@alchallis.com)**



Uniclass L725111	EPIC G611
CI/SfB (74.26)	X



LSP-0022



LSP-0022



LSP-0024



LSP-22



LSP-02



LSP-002



LSP-05



LSP-005



LSP-06



LSP-07

 01628 529024

 [www.alchallis.com](http://www.alchallis.com)

@ [info@alchallis.com](mailto:info@alchallis.com)



**WRAS**  
APPROVED  
PRODUCT