



Uniclass L725111	EPIC G611
CI/SIB (74.26)	X

DATA

Maximum Temperature 80°c
 Minimum Pressure 1.0 bar
 Maximum Pressure 12.0 bar
 Connections 15mm Push Fit
 Normal Flow Rates 8 Litres per Minute @ 3 bar

MATERIALS

Body ABS Plastic
 Shower Rose ABS Plastic
 Internals Brass Body with ABS Plastic Aerator

APPLICATION

Our water saving showerheads conform to the highest standards and are designed for use in a wide range of applications. Anti Vandal units particularly suit sports centres, swimming pools, barrack, hostels, prisons or where applications require functionality combined with robust good looks.

ORDER NUMBER

255 Bottom Entry
 250 Rear Entry


Aquiv8 Anti Vandal Water Saving Showerheads



Aquiv8 255



Aquiv8 250

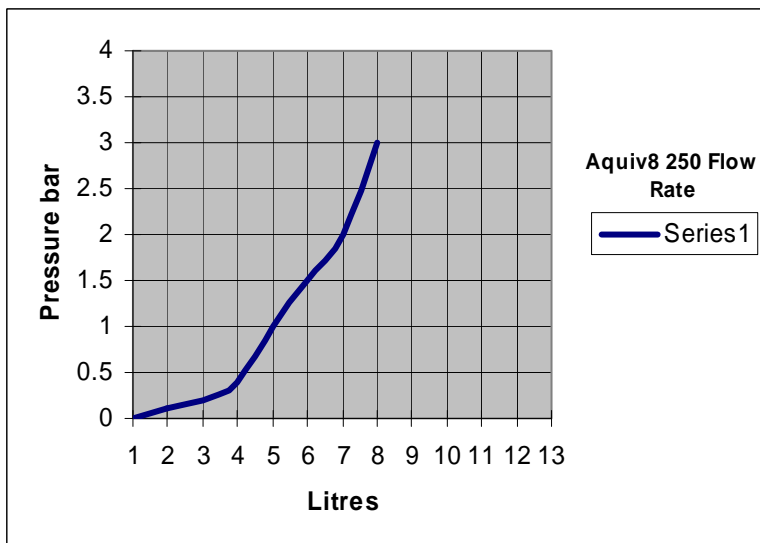

- Can cut water and energy bills by as much as 70% with no loss in performance
- Anti-Scale
- No moving parts to replace
- Robust & reliable
- 12 month guarantee

 01628 529024

 www.alchallis.com

@ info@alchallis.com