



Uniclass L725111	EPIC G611
CI/SIB (74.26)	X

**DATA**

Maximum Temperature 80°c  
 Minimum Pressure 1.0 bar  
 Maximum Pressure 12.0 bar  
 Connections 15mm Push Fit  
 Normal Flow Rates 8 Litres per Minute @ 3 bar

**Aquiv8 Anti Vandal Water Saving Showerheads**

**MATERIALS**

Body ABS Plastic  
 Shower Rose ABS Plastic  
 Internals Brass Body with ABS Plastic Aerator

**APPLICATION**

Our water saving showerheads conform to the highest standards and are designed for use in a wide range of applications. Anti Vandal units particularly suit sports centres, swimming pools, barrack, hostels, prisons or where applications require functionality combined with robust good looks.

**ORDER NUMBER**


255 Bottom Entry  
 250 Rear Entry



Aquiv8 255



Aquiv8 250

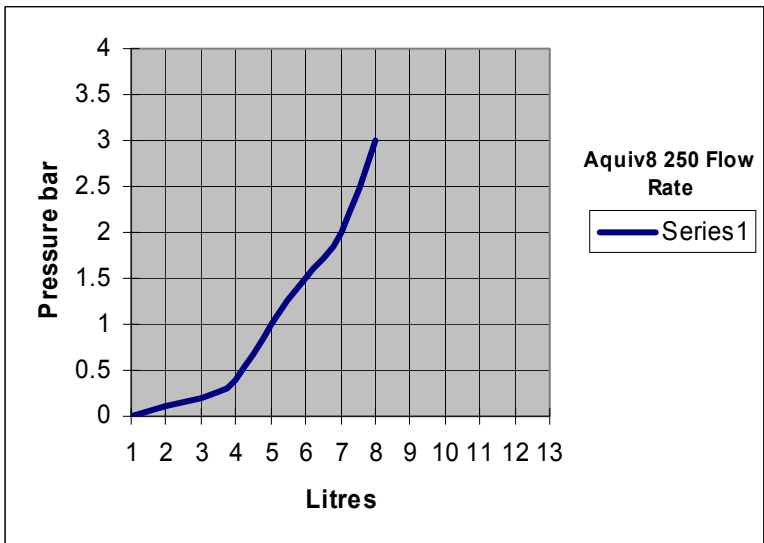

- Can cut water and energy bills by as much as 70% with no loss in performance
- Anti-Scale
- No moving parts to replace
- Robust & reliable
- 12 month guarantee

 0870 7657987

 [www.alchallis.com](http://www.alchallis.com)

@ [info@alchallis.com](mailto:info@alchallis.com)

