



| | |
|---------------------|--------------|
| Uniclass L725111 | EPIC G611 |
| CI/SIB (74.26) | X |

Aquiv8 260 Water Saving Showerhead

DATA

Maximum Temperature 80°c
 Minimum Pressure 1.0 bar
 Maximum Pressure 12.0 bar
 Connections Female ½" BSP
 Normal Flow Rates 8 Litres per Minute
 Normal Flow Rates Adjustable 4-13 Lpm

MATERIALS

Body Brass with Chrome Plate Finish
 Shower Shock Proof ABS Plastic
 Swivel Brass with Chrome Plate Finish And NylonSocket

APPLICATION


Our water saving showerheads conform to the highest standards and are designed for use in a wide range of applications. 260 units particularly suit private sports centres, hotels and similar applications that require functionality combined with good looks. These units are not suitable for use with low pressure gravity fed systems

ORDER NUMBER

260 Chrome Finish
 261 Chrome Finish (Adjustable)



- Can cut water and energy bills by as much as 50% with no loss in performance
- Anti-Scale
- No moving parts to replace
- Robust & reliable
- 12 month guarantee
- Approved on Governments Water Technology List as water saving

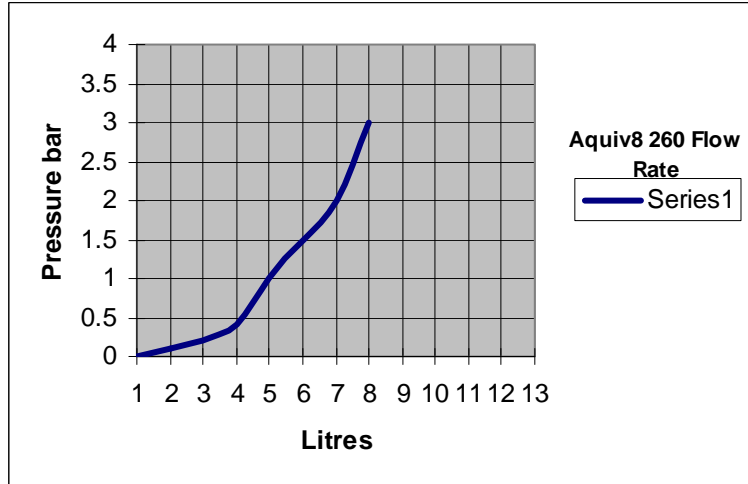

 01628 529024
 www.alchallis.com
 @ info@alchallis.com