



Uniclass L725111	EPIC G611
CI/SB (74.26)	X

Aquiv8 412 Water Saving Shower

DATA

Maximum Temperature	80°c
Minimum Pressure	1.0 bar
Maximum Pressure	12.0 bar
Connections Male	½” BSP
Adjustable Flow rate	4-8 Litres per minute
Weight	75 g
Length	22 cm
Width (Face)	6.5 cm

MATERIALS

Body Shock Proof ABS Plastic

APPLICATION


Our water saving showerheads conform to the highest standards and are designed for use in a wide range of applications. Flow rates can be adjusted to suit bespoke requirements. 412units particularly suit residential applications that require functionality combined with good looks. **Units not suitable for use with low pressure gravity fed system**

ORDER NUMBER

412 Chrome Finish



- Can cut water & energy bills by up to 50% with no loss of performance.
- Anti Scale
- No Moving Parts to Replace
- Robust & Reliable
- 3 year Guarantee
- Approved on Governments Water Technology List as water saving

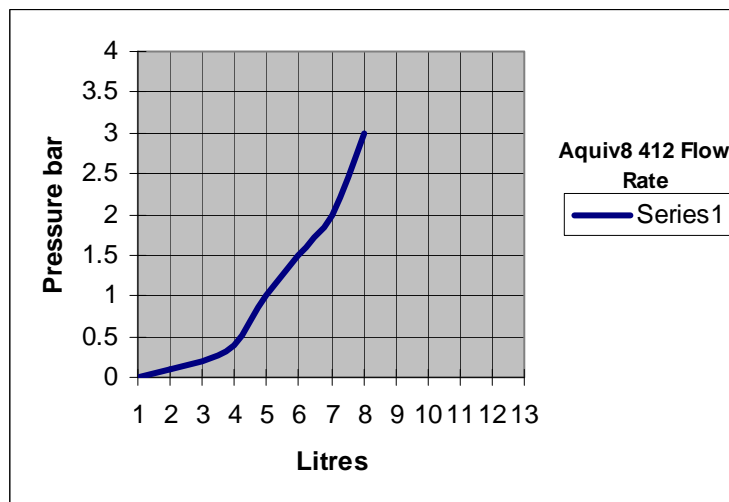

01628 529024

www.alchallis.com

@ info@alchallis.com

