



| | |
|---------------------|--------------|
| Uniclass L725111 | EPIC G611 |
| CI/SB (74.26) | X |

DATA

Maximum Temperature 80°C
 Minimum Pressure 1.0 bar
 Maximum Pressure 12.0 bar
 Connections Male ½" BSP
 Normal Flow Rates 8 Litre pm @3 bar
 Weight 75 g
 Length 22 cm
 Width (Face) 6.5 cm

MATERIALS

Body Shock Proof ABS Plastic

APPLICATION

Our water saving showerheads conform to the highest standards and are designed for use in a wide range of applications. 412units particularly suit residential applications that require functionality combined with good looks. **Units not suitable for use with electric showers or low pressure gravity fed system**


ORDER NUMBER

412 Chrome Finish

Aquiv8 412 Water Saving Shower



- Can cut water & energy bills by up to 50% with no loss of performance.
- Anti Scale
- No Moving Parts to Replace
- Robust & Reliable
- 12 month Guarantee
- Approved on Governments Water Technology List as water saving

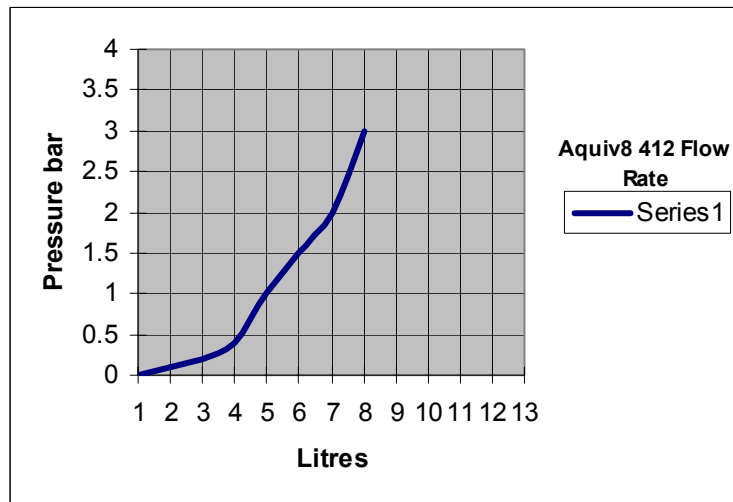

0870 7657987



www.alchallis.com



info@alchallis.com

