



Uniclass L725111	EPIC G611
CI/SB (74.26)	X

DATA

Maximum Temperature 80°c
 Minimum Pressure 1.0 bar
 Maximum Pressure 12.0 bar
 Connections Male ½” BSP
 Normal Flow Rates 8 Litre pm @3 bar
 Weight 75 g
 Length 22 cm
 Width (Face) 6.5 cm

Aquiv8 412 Water Saving Shower

MATERIALS

Body Shock Proof ABS Plastic

APPLICATION


Our water saving showerheads conform to the highest standards and are designed for use in a wide range of applications. 412units particularly suit residential applications that require functionality combined with good looks. **Units not suitable for use with low pressure gravity fed system**



ORDER NUMBER

412 Chrome Finish

- Can cut water & energy bills by up to 50% with no loss of performance.
- Anti Scale
- No Moving Parts to Replace
- Robust & Reliable
- 12 month Guarantee
- Approved on Governments Water Technology List as water saving

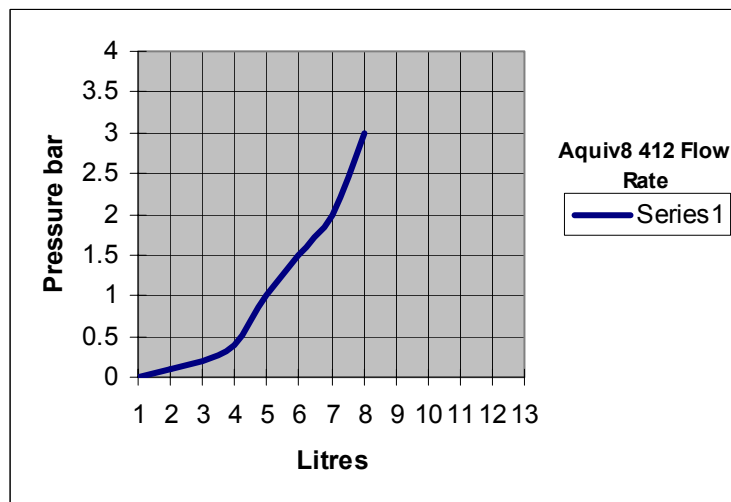

WRAS
APPROVED PRODUCT

0870 7657987

www.alchallis.com

@ info@alchallis.com

