



Uniclass L725111	EPIC G611
CI/SfB (74.26)	X

DATA

Maximum Temperature	80° c
Minimum Pressure	1.0 bar
Maximum Pressure	12.0 bar
Connections	Female 1/2" BSP
Normal Flow Rates	8 Litres per Minute
Diam	180mm

**Aquiv8 9399-0000
Water Saving Drench
Showerhead
Eco Designation**

MATERIALS

Body	Brass with Chrome Plate Finish
Shower	Steel with Chrome Plate
Swivel	Brass with Chrome Plate Finish And NylonSocket


APPLICATION

Our water saving showerheads conform to the highest standards and are designed for use in a wide range of applications. These units particularly suit private sports centres, hotels and similar applications that require functionality combined with good looks. These units are not suitable for use with electric showers or low pressure gravity fed systems



ORDER NUMBER

9399-0000Eco Chrome Finish

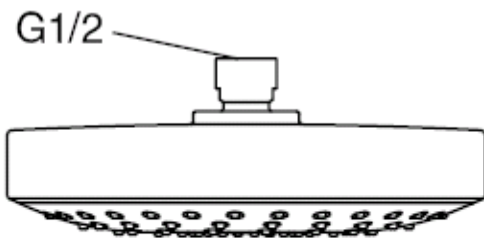

- Can cut water and energy bills by as much as 50% with no loss in performance
- Anti-Scale
- No moving parts to replace
- Robust & reliable
- 12 month guarantee

Ø180



 0870 7657987

 www.alchallis.com

 info@alchallis.com

